


BWPG3

High Efficacy Wall Pack

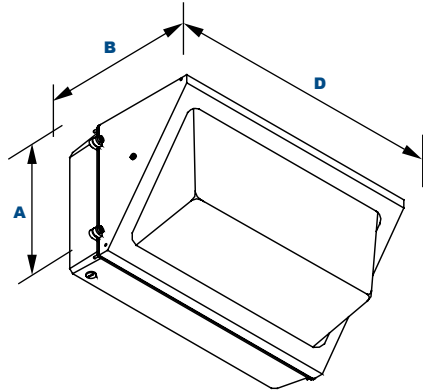

Dimensions

Width (D)	14.4" (367mm)
Length (B)	7.13" (181mm)
Height (A)	9.29" (236mm)

The LiteSheet High Efficacy Wall Pack (BWPG3) luminaire provides optically controlled wide spread light distribution designed to replace HID lighting systems from 70w to 250w MH or HPS. Typical wall mounted lighting applications include retail centers, industrial parks, schools and universities, public transit and airports, office buildings and medical facilities. Mounting heights of 12 to 18 feet can be used based on light level and uniformity requirements. Using LiteSheet's patented BriteCor AC Direct Technology, the BWPG3 provides an industry leading efficacy up to 128 lumens per watt.

Specifications and Features:

Housing:

Die Cast Aluminum Housing & Hinged Front Frame, 1/2" Coin Plugs with O-rings for Conduit & Photocell. Gasketed.

Finish:

Textured Architectural Bronze Powdercoat Finish Over a Chromate Conversion Coating. Custom Colors Available Upon Request.

Lens:

Molded Prismatic Borosilicate Glass Lens

Mounting Options:

Cast-in Template for Mounting Directly Over a 4" Recessed Outlet Box, or Use 1/2" Conduit.

Wattage:

System: 24W, 36W, 48W, 54W and 64W

Voltage:

120VAC or 277V, 60Hz

BriteCor AC Direct Technology - No DC Power Supply

L70 Projection: >200,000 hours

Lowest total cost of ownership. For TCO examples visit: <https://www.litesheet.com/total-cost-of-ownership>

Listing & Ratings:

ETL Listed: UL 8750

Operating Temperatures: -40°C to +50°C

Dimmable option available.

15-Year Warranty

NOTE: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions.

Specifications subject to change without notice. Production parts may vary based on configuration and availability.

Options: Lead times will vary based on options and product configuration. Consult with your sales representative.

Order Information Example:

BWPG3-24-2-4080-Z/ZT

Model	Wattage	Voltage	CCT/CRI	Color	Options
BWPG3					
BWPG3 = High Efficacy Wall Pack	24 =24W/3072 Lumens 36 =36W/4608 Lumens 48 =48W/6144 Lumens 54 =54W/6912 Lumens 64 =64W/8192 Lumens	1 =120VAC 2 =277VAC	4080 =4000K 5080 =5000K CRI =80	Z =Bronze C =Custom (Consult Factory)	ZT =0-10VDC 3rd Party Compatible WG =Wire Guard V =Visor

Custom Wattages Also Available up to 64W (XX)

Metal Halide Wall Pack	Lumen Output	LiteSheet Wattage	LiteSheet Part Number	Description
70W MH WALLPACK	3100	24	BWPG3-24-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 24W
100W MH WALLPACK	4600	36	BWPG3-36-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 36W
250W MH WALLPACK	7000	54	BWPG3-54-V-CT80-Z	Medium High Efficacy Wall Pack Fixture, 54W

LiteSheet 0-10V Gen 3 Dimmer Recommended List	
Manufacturer	Model Number
Lutron	NTSTV-DV NOVA T
Lutron	DVSTV-453PH-WH
Leviton	DS710-10Z

