

## APPLICATIONS

The BCMG3 is a high efficacy, stylish ceiling/wall mounted luminaire that is available in a variety of LED combinations and sizes enhanced by a linear sided acrylic diffuser. The BCMG3 is designed for baths, kitchens, rec rooms, corridors, aisles, stairwells, over mirrors, over bulletin boards, in vanities, and in displays. Using LiteSheet's patented BriteCor AC Direct Technology, the BCMG3 delivers an industry leading efficacy up to 152 lumens per watt.

## FEATURES & BENEFITS

- ◆ BriteCor AC Direct technology - No DC power supply
- ◆ 15 year non-prorated warranty
- ◆ High Efficacy Up To 152 Lumens per Watt
- ◆ Input voltage 120V, 277V - 60Hz
- ◆ Back plate provided with knockout and mounting holes
- ◆ Enhanced by linear sided acrylic diffuser
- ◆ Overlapping end caps for uniformity and dimensional stability
- ◆ ETL Certification: UL 8750
- ◆ Optional 0-10V 3rd party compatible dimming
- ◆ L70 Projection: >200,000 hours
- ◆ Lowest total cost of ownership in the market. For TCO examples visit: <https://www.litesheet.com/total-cost-of-ownership>




## ORDERING DATA

EXAMPLE: BCMG3-4-12-2-4080/ZT

BCMG3		Wattages		Voltage (V)	Color Temp/CRI	Options
Series	Size	Wattages/Lumens			First 2 Digits Temp	Dimmer
BCMG3	2 2-foot 4 4-foot	12 Watts/1850 lumens 18 Watts/2750 lumens 24 Watts/3650 lumens 36 Watts/5500 lumens 48 Watts/7300 lumens 54 Watts/8400 lumens 64 Watts/9750 lumens		1 120V 2 277V	35 3500K 40 4000K 50 5000K	(Blank) None ZT 0-10V 3rd party compatible
					Second 2 Digits CRI	Cable
					80 80 CRI Standard	Blank None CS6 6'Cord 18/3 CS8 8'Cord 18/3 CS12 12'Cord 18/3 WP6 6'Whip - MC WP12 12'Whip - MC

Custom Wattages Also Available up to 64W (XX)

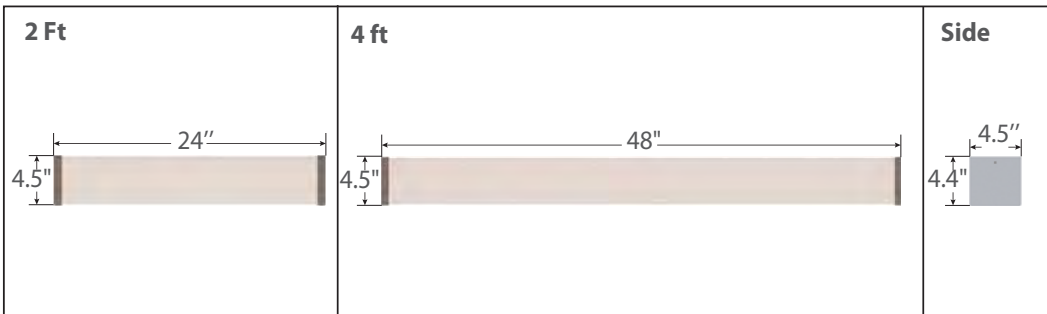

Dimmer	Cable	Emergency
(Blank) None	Blank None	Blank None
ZT 0-10V 3rd party compatible	CS6 6'Cord 18/3	EM1 Emergency 500 lumens
	CS8 8'Cord 18/3	EM12 Emergency 1200 lumens
	CS12 12'Cord 18/3	
	WP6 6'Whip - MC	
	WP12 12'Whip - MC	

LiteSheet 0-10V Gen 3 Dimmer Recommended List	
Manufacturer	Model Number
Lutron	NTSTV-DV NOVA T
Lutron	DVSTV-453PH-WH
Leviton	DS710-10Z

NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions. Specifications subject to change without notice. Production parts may vary based on configuration and availability.

Options: Lead times will vary based on options and product configuration. Consult with your sales representative.

