

APPLICATIONS

The BSPG3 is a high efficacy LED Strip Fixture that delivers the only AC Direct LED technology on the market with an efficacy up to 164 lumens per watt. Optional frosted diffuser lenses help minimize glare and improve aesthetics. Suitable for most commercial, industrial, and institutional applications such as office, retail, and warehouses.

FEATURES & BENEFITS


- ◆ AC Direct technology - No DC power supply
- ◆ 15 year non-prorated warranty
- ◆ High Efficacy Up To 164 lumens per watt
- ◆ Input voltage 120V, 277V - 60Hz
- ◆ Available for 4' and 8' configurations
- ◆ Lightweight aluminum construction with frosted diffuser
- ◆ ETL Certification: UL 8750
- ◆ Optional 0-10V 3rd party compatible dimming
- ◆ Optional frosted diffuser available to help minimize glare and improve aesthetics
- ◆ Precision brake formed from heavy gauge cold rolled steel
- ◆ Highly durable and reflective white finish
- ◆ L70 Projection: >200,000 hours
- ◆ Lowest total cost of ownership in the market. For TCO examples visit: <https://www.litesheet.com/total-cost-of-ownership>


ORDERING DATA
EXAMPLE: BSPG3-4-12-2-4080/ZT

BSPG3		Wattages		Voltage (V)	Color Temp/CRI	Options
Series	Size	Wattages/Lumens			Color Temp/CRI	
BSPG3	4 4-foot			1 120V	First 2 Digits Temp	Dimmer
	8 8-foot			2 277V	35 3500K	(Blank) None
		12 Watts/1850 lumens			40 4000K	ZT 0-10V 3rd party compatible
		18 Watts/2750 lumens			50 5000K	Cable
		24 Watts/3650 lumens			Second 2 Digits CRI	Blank None
		36 Watts/5500 lumens			80 80 CRI Standard	CS6 6' Cord 18/3
		48 Watts/7300 lumens				CS8 8' Cord 18/3
		54 Watts/8400 lumens				CS12 12' Cord 18/3
		64 Watts/9750 lumens				WP6 6' Whip - MC
						WP12 12' Whip - MC
						Lens
						Blank None
						FR-4 4' Frosted Acrylic Diffuser
						FR-8 8' Frosted Acrylic Diffuser

Custom Wattages Also Available up to 64W (XX)

Dimensions 4':

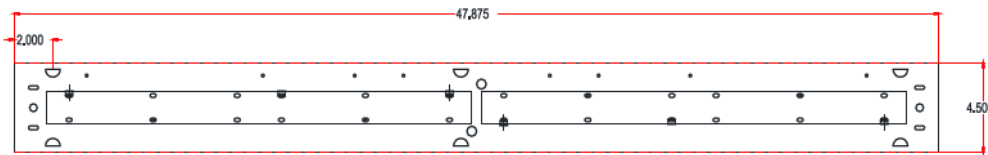

Dimensions 8':



NOTE: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions. Specifications subject to change without notice. Production parts may vary based on configuration and availability. Options: Lead times will vary based on options and product configuration. Consult with your sales representative.

